




Main Dimensions

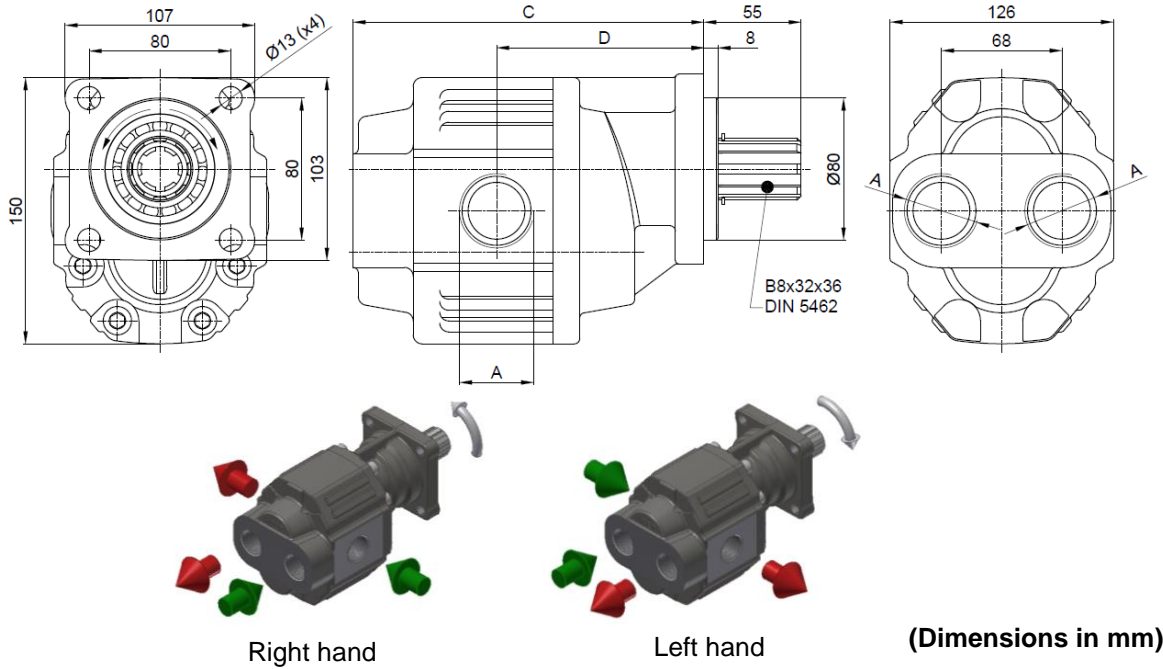

Main Data

Pumps B34GT		38	45	52	61	70	82	90	105	115	125	
Displacement	cm ³ /rev	38	46	52	61	70	82	91	102	116	125	
Max. rotation speed	rpm	2500	2500	2200	2000	1900	1800	1800	1600	1600	1500	
Min. rotation speed	rpm	500	500	500	500	500	500	500	500	500	500	
Max. continuous pressure	bar	280	280	260	240	220	210	190	190	180	170	
Max. intermittent pressure (max. 20s)	bar	300	300	280	260	240	230	210	210	200	190	
Max. peak pressure (max. 6s)	bar	315	315	295	275	255	245	225	225	215	205	
Weight	kg	11.0	11.2	11.5	12.5	13.0	13.5	14.0	15.0	15.5	16.0	
Sense of rotation		Bi-directional										
A - Inlet /Outlet (DIN ISO 228)	G (BSP)	3/4"			1"			1 1/4"				
C	mm	171	176	179	185	191	198	204	213	219	226	
D	mm	106	109	112	117	118	123	127	130	132	135	

How to order:

Example: Pump 38cm³/rev, continuous pressure up to 280 bar; peak pressure up to 315 bar, ref.B34GT → B34GT38


Note: Usually, used in frontal cylinders

Fluids	mineral oils type ISO HM or DIN 51524-2 HLP	
Operating viscosity range	10 to 100 cSt (mm ² /s) at working temperature	
Máx operating limits viscosity	750 cSt	
Oil temperature range	-25°C to 80°C	
Filtration	>200bar = 10µm	<200bar = 25 µm
In the application of any of these pumps; the use of these data does not exempt the reading of the instruction "Gear pumps recommendations before start-up".		

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown

ABER HYDRAULICS S.A.

Rua Francisco de Almeida, Nº 30 – Vila Nova da Telha – 4470-410 Maia - Portugal
 Phone: +351.22.9438070 | E-mail: aber@aber.pt | <http://www.aber.pt>

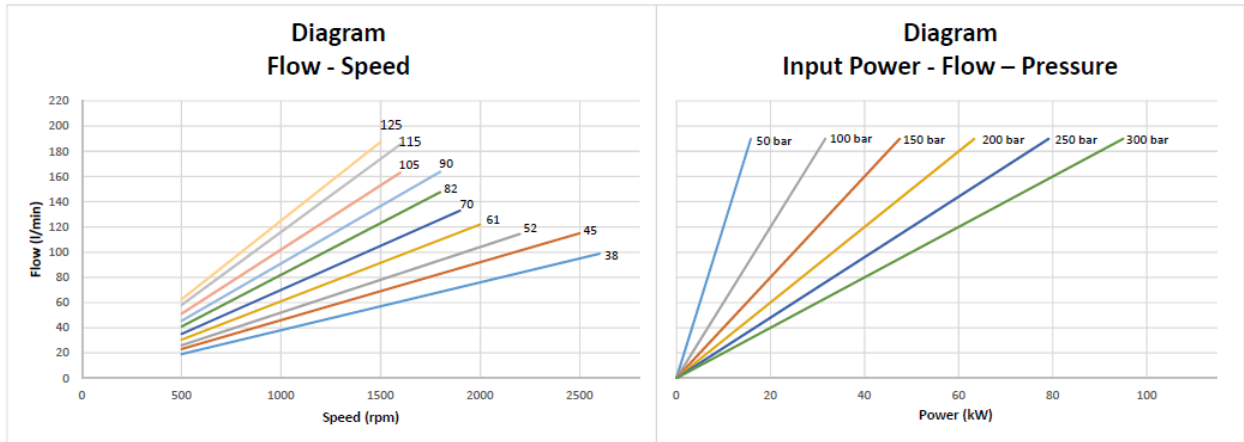

Hose dimensions

Inlet Hose	
Flow (l/min)	Internal pipe diameter (inch)
30-40	1"1/4
50-60	1"1/2
70-90	1"3/4
100-120	2"
130-150	2"1/4
160-190	2"1/2
200-230	2"3/4
240-270	3"

Outlet Hose					
Flow (l/min)	Internal pipe diameter (inch)				
	30	1/2"	1/2"	1/2"	1/2"
40	5/8"	1/2"	1/2"	1/2"	
50	5/8"	5/8"	5/8"	1/2"	
60	3/4"	5/8"	5/8"	5/8"	
70	1"	3/4"	3/4"	5/8"	
80	1"	3/4"	3/4"	3/4"	
90	1"	1"	1"	3/4"	
100	1"	1"	1"	1"	
110	1"	1"	1"	1"	
120	1"	1"	1"	1"	
130	1"	1"	1"	1"	
140	1"1/4	1"	1"	1"	
150	1"1/4	1"	1"	1"	
160	1"1/4	1"1/4	1"	1"	
170	1"1/4	1"1/4	1"	1"	
180	1"1/4	1"1/4	1"1/4	1"	
190	1"1/4	1"1/4	1"1/4	1"	
200	1"1/2	1"1/4	1"1/4	1"1/4	
210	1"1/2	1"1/4	1"1/4	1"1/4	
220	1"1/2	1"1/4	1"1/4	1"1/4	
230	1"1/2	1"1/2	1"1/4	1"1/4	
240	1"1/2	1"1/2	1"1/4	1"1/4	
		50-100	100-150	150-200	200-300
P (bar)					

Important notes:

- Other axis available, please consult "Axel options".

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown

ABER HYDRAULICS S.A.

Rua Francisco de Almeida, Nº 30 – Vila Nova da Telha – 4470-410 Maia - Portugal

Phone: +351.22.9438070 | E-mail: aber@aber.pt | <http://www.aber.pt>