


## Double Spin-On Filter Heads ■ SSF-24B

## Dimensions



Dimensions in mm / in

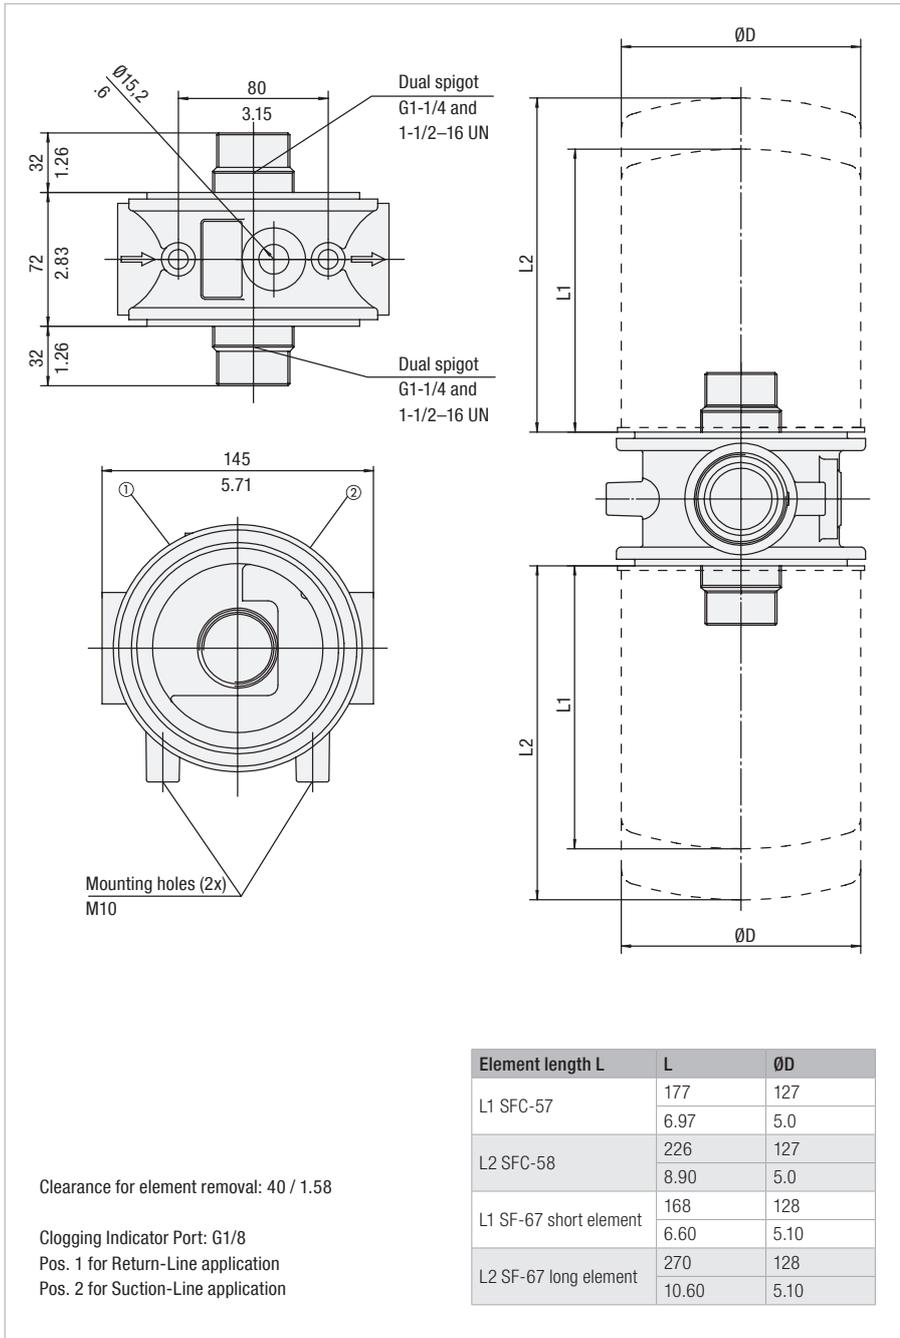

## Technical Data

## Construction

- In-line Double Spin-On filter head

## Material

- Aluminium

## Port Connections

- BSP

## Flow Rate

- 454 l/min / 120 US GPM for Return-Line application
- 132 l/min / 35 US GPM for Suction-Line application

## Operating Pressure

- Max. 12 bar / 174 PSI
- Max. 5 bar / 72.5 PSI differential pressure (for any application without bypass valve)

## Temperature Range

- -30 °C ... +100 °C / -22 °F ... +212 °F

## Media Compatibility

- Mineral oils, other fluids on request

## Options and Accessories



## Filter Elements

- For use with SF-67 and SFC-57/58 series elements
- For element types with seal contour type A and B
- For element types and flow characteristics see page 176 for SF67 and page 174 for SFC-57/58
- The element is not part of the scope of delivery

## Valve

- Bypass valve (integrated in the head): Optional

## Clogging Indicators

- For clogging indicator types see page 177

## Order Code

**SSF - 24B - B1.7 - 4**

①

②

③

④

## ① Type

 Double Spin-On Filter Head **SSF**

## ② Connection Style

Connection	Thread	Code
BSP	1-1/2	<b>24B</b>

## ③ Bypass Options

No bypass	<b>0</b>
0,2 bar / 3 PSI	<b>B0.2</b>
1,7 bar / 25 PSI	<b>B1.7</b>

Note: Other settings available on request.

## ④ Clogging Indicator Port Options

All clogging indicator ports drilled	<b>4</b>
Special	<b>9</b>

Note: Standard clogging indicator port is G1/8.

