

TELECRANE

Industrial Radio Remote Control

F21 Series



F21-2S/2D

F21-4S/4D

F21-E1

F21-4SB

F21-E1B



F21-2S(S)

Features

- Low Power Consumption(Eco-Friendly)
2 AA Size Batteries last up 2 months in regular operation.
- Enclosure Durability(Harsh Environment)
Nylon-Fiber made housing for extra shock resistant.
- Windows Software
Programmable function setting through PC.
- Pre-Wiring Receiver
Receiver pre-installed wire made the installation easy and fast ever.









| F21 Series SPEC. | |
|--------------------|----------------------|
| Emission Power | <10mW |
| ID Code | 4.3 billion(32 bits) |
| Operating Temp. | -35~80°C |
| Enclosure | Nylon Fiber |
| Operating Distance | Up to 100M |
| Transmitter Power | 2 AA size Batteries |

| F21-2/4/E1/E1B Transmitter | | |
|----------------------------|-----------------|-------------|
| Model | Weight | Dimension |
| F21-2S/2D | 120g | 130x45x22mm |
| F21-4/E1 | 265g | 156x61x51mm |
| F21-4SB/E1B | 380g | 164x75x46mm |
| F21-2/4/E1/E1B Receiver | | |
| F21-2/4/E1/E1B | 550g(w/o cable) | 185x85x85mm |
| F21-2S(S) | 352g(w/o cable) | 84x82x48mm |

TELECRANE

Industrial Radio Remote Control

F21 Series

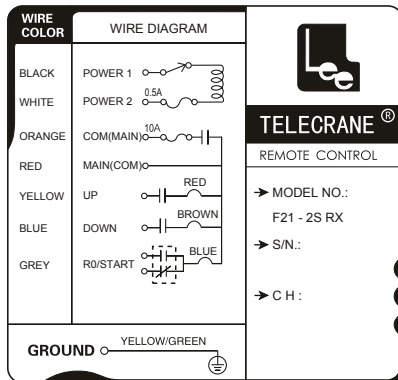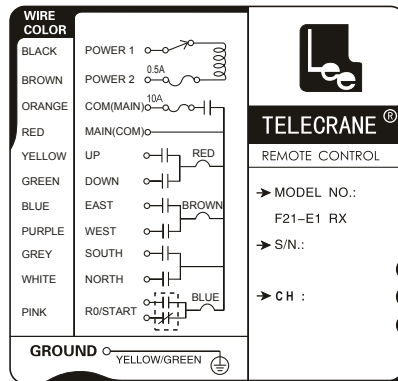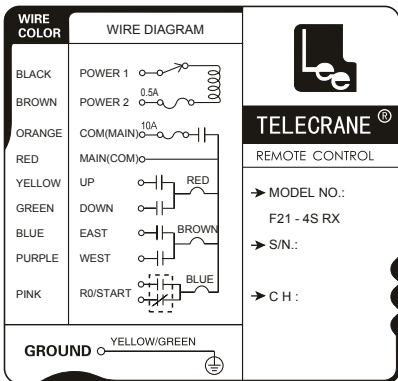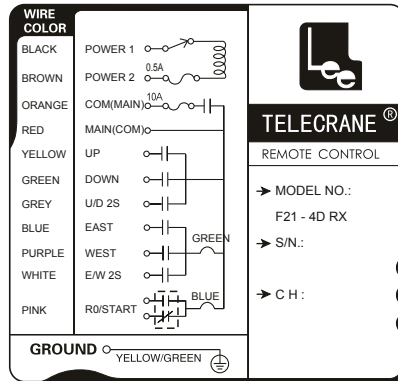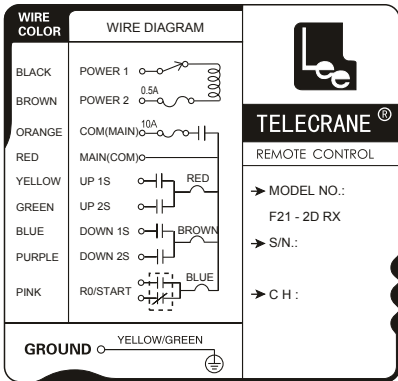

ACCESSORIES



Copier



Passive Antenna



Tx Protective Cover



Battery Charger