

VERTICAL MULTISTAGE CENTRIFUGAL ELECTRIC PUMPS

in cast iron



Cast iron vertical multistage centrifugal electric pumps.

APPLICATIONS

- Pressure boosting plants
- General pressure increases
- Irrigation
- Washing plants
- Pumping clean water

TECHNICAL DETAILS

- Reliable
- Silent
- Easy maintenance
- Electric pumps supplied with counter-flanges

PUMP TECHNICAL DATA

- Maximum working pressure: 11 bar
- Maximum temperature of the liquid: 40°C
- G1¼ suction and discharge connection
- MEI > 0.4

For further information please see our Data Book on the web site www.ebara-europe.com

MOTOR TECHNICAL DATA

- IE2 and IE3 high energy-efficiency motors starting from 0.75kW
- Self-ventilated 2 pole asynchronous motor
- Class of insulation F
- IP44 Protection degree
- 230V ±10% 50Hz single phase voltage, 230/400V ±10% 50Hz three phase voltage
- Permanent capacitor inserted and thermo-amperometric protection with automatic rearm incorporated for the single phase motor
- Protection under user's responsibility for the three phase version


MATERIALS

- Cast iron pump casing and motor bracket
- External casing in AISI 304
- Impeller and diffuser in PPE+PS reinforced with fibreglass
- Stages in PPE+PS reinforced with fibreglass/PTFE
- Shaft in AISI 416
- Mechanical seal in Ceramic/Carbon/NBR


ACCESSORIES (On request)

- Electric panels
- Vessels
- Floats
- Pressure switches
- Presscomfort - Pressure regulator
- E-power - Variable speed control system
- E-drive - Frequency converter

PERFORMANCE CURVES (according to ISO 9906 Attachment A)

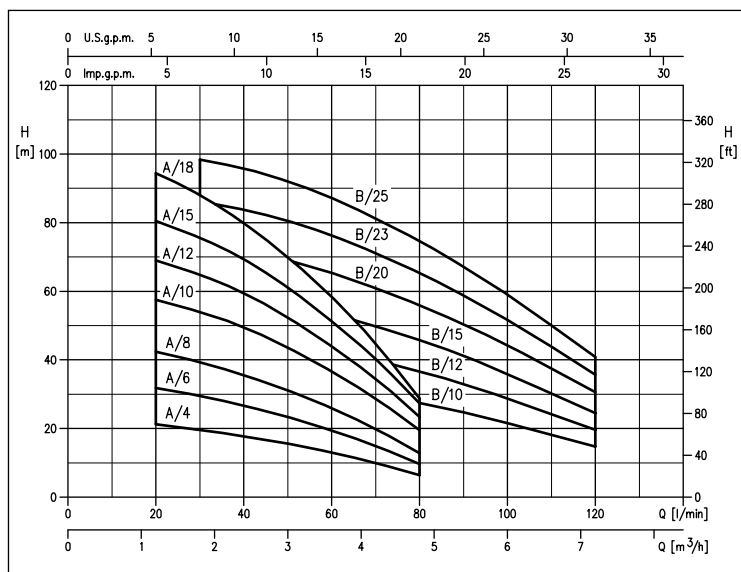


IDENTIFICATION CODE

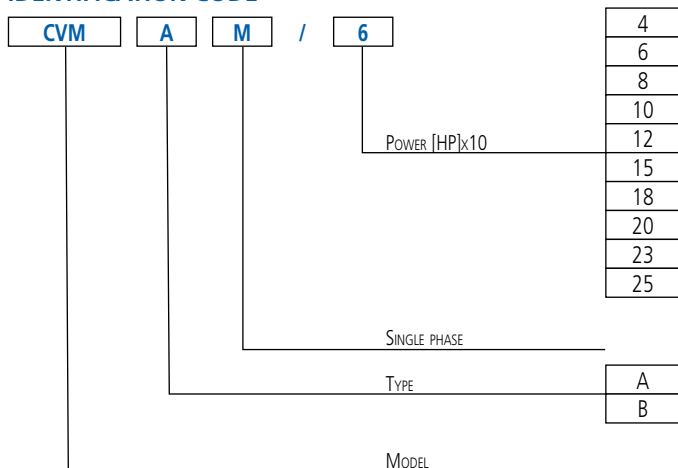


VERTICAL MULTISTAGE CENTRIFUGAL ELECTRIC PUMPS in cast iron


CVM A range PERFORMANCE CURVES (from 0.3 to 0.6 kW)
(according to ISO 9906 Attachment A)

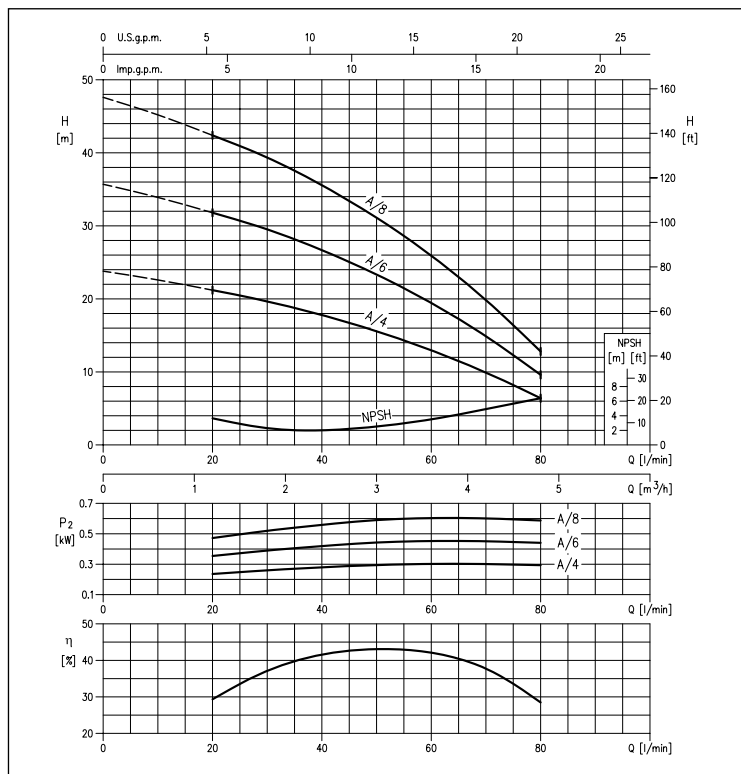

CVM A range PERFORMANCE CURVES (from 0.75 to 1.1 kW)
(according to ISO 9906 Attachment A)

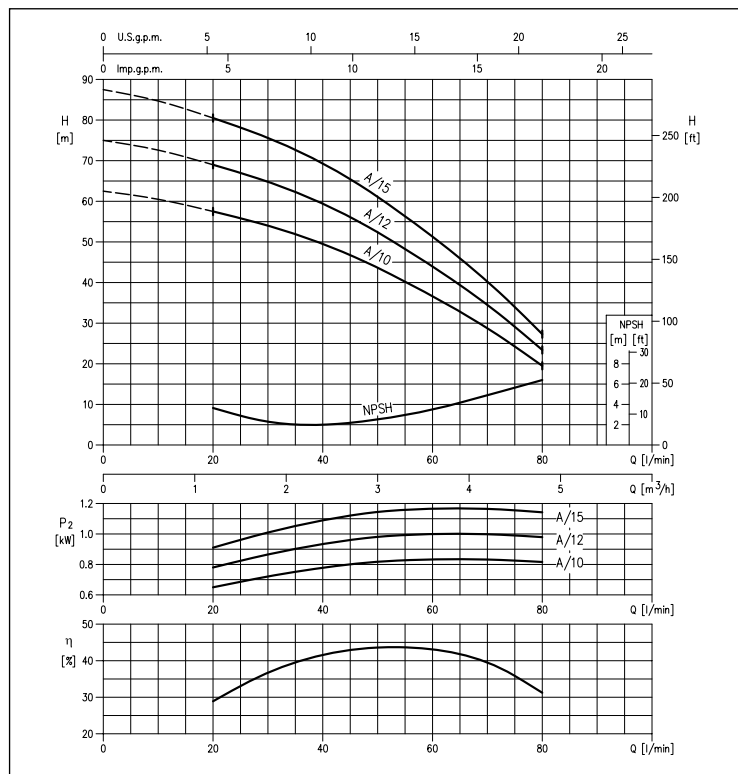


CVM A range PERFORMANCE CURVES (1.3 kW)
(according to ISO 9906 Attachment A)

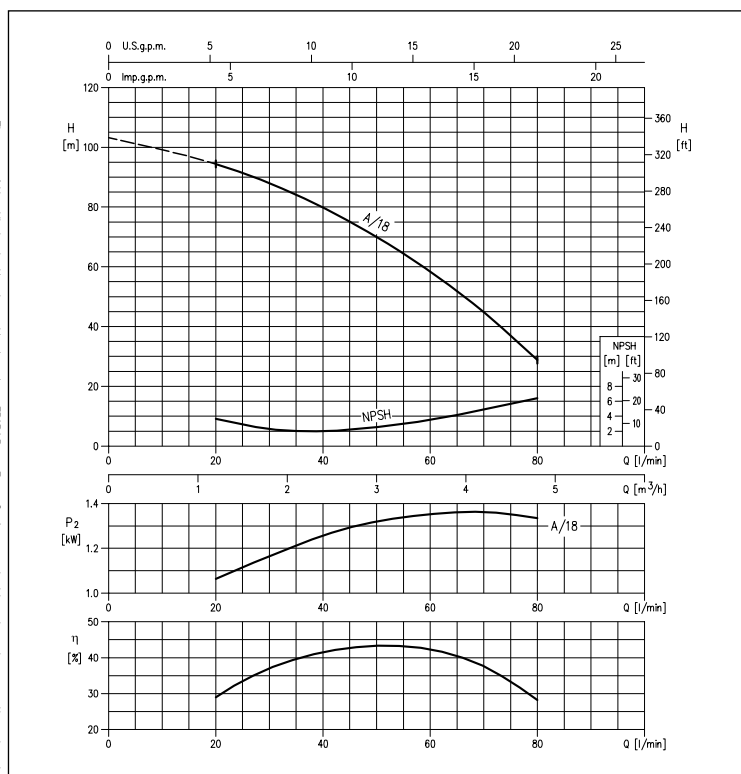


VERTICAL MULTISTAGE CENTRIFUGAL ELECTRIC PUMPS in cast iron

CVM B range PERFORMANCE CURVES (from 0.75 to 1.1 kW)
(according to ISO 9906 Attachment A)

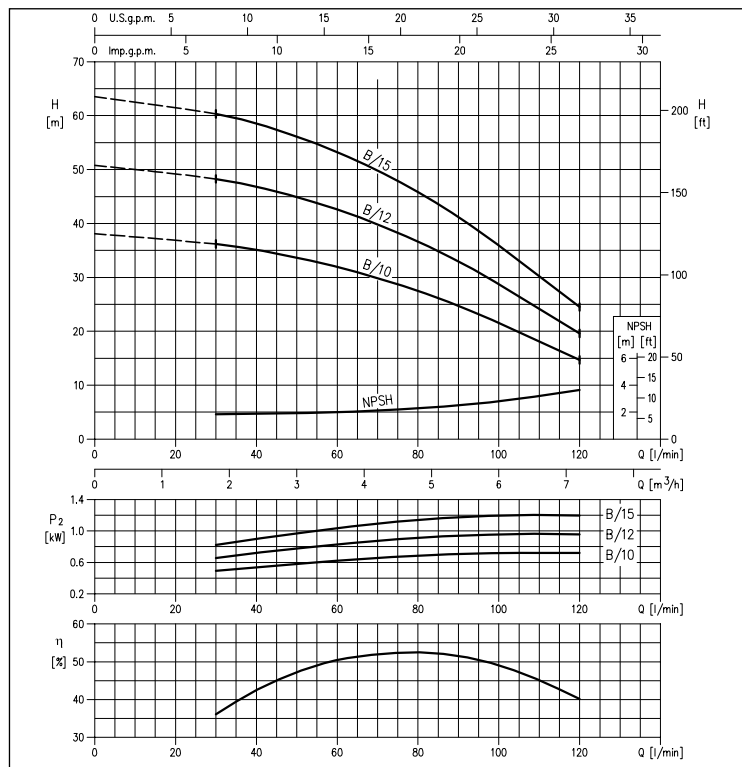

CVM B range PERFORMANCE CURVES (from 1.5 to 1.85 kW)
(according to ISO 9906 Attachment A)

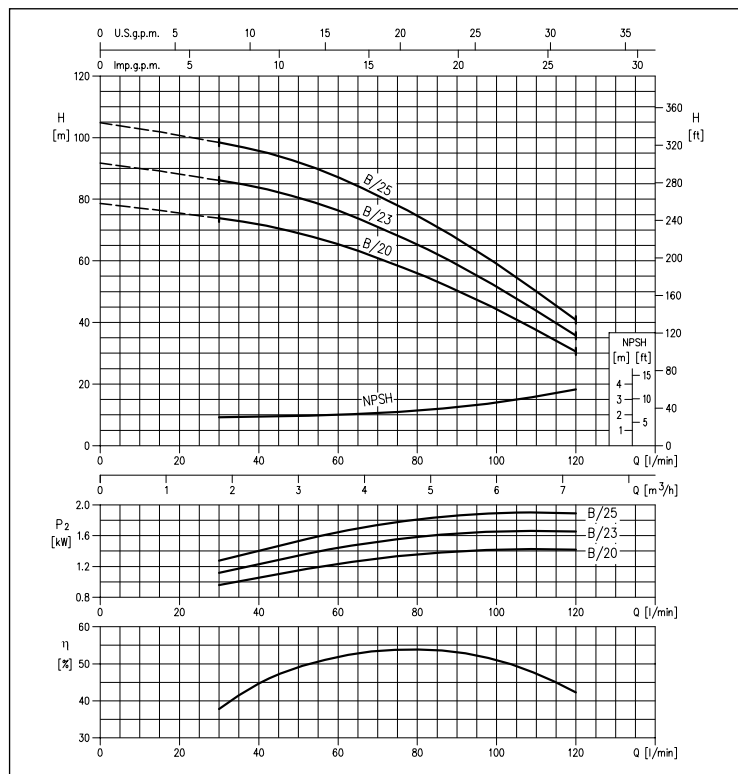


PERFORMANCE CHART

Model		P ₂		Q = Flow Rate								
Single phase 230V	Three phase 230/400V	[HP]	[kW]	l/min m³/h	20 1.2	30 1.8	40 2.4	50 3	60 3.6	80 4.8	100 6	120 7.2
				H=Head [m]								
CVM AM/4	CVM A/4	0.4	0.3	21.2	19.7	17.8	15.6	13.0	6.4	-	-	-
CVM AM/6	CVM A/6	0.6	0.44	31.8	29.5	26.7	23.3	19.4	9.6	-	-	-
CVM AM/8	CVM A/8	0.8	0.6	42.5	39.4	35.6	31.1	25.9	12.8	-	-	-
CVM AM/10	CVM A/10	1	0.75	57.5	54.0	49.5	43.5	36.6	19.5	-	-	-
CVM AM/12	CVM A/12	1.2	0.9	69.0	65.0	59.5	52.5	44.0	23.4	-	-	-
CVM AM/15	CVM A/15	1.5	1.1	80.5	75.5	69.5	61.0	51.0	27.3	-	-	-
CVM AM/18	CVM A/18	1.8	1.3	94.5	88.0	80.0	70.0	58.5	28.8	-	-	-
CVM BM/10	CVM B/10	1	0.75	-	36.2	35.1	33.7	32.0	27.5	21.6	14.7	-
CVM BM/12	CVM B/12	1.2	0.9	-	48.0	46.8	45.0	42.6	36.6	28.8	19.6	-
CVM BM/15	CVM B/15	1.5	1.1	-	60.5	58.5	56.2	53.3	45.8	36.0	24.5	-
CVM BM/20	CVM B/20	2	1.5	-	74.0	72.0	69.0	65.5	56.0	44.5	30.6	-
CVM BM/23	CVM B/23	2.3	1.7	-	86.0	84.0	80.5	76.5	65.5	51.5	35.7	-
-	CVM B/25	2.5	1.85	-	98.5	96.0	92.0	87.0	74.5	59.0	41.0	-

VERTICAL MULTISTAGE CENTRIFUGAL ELECTRIC PUMPS in cast iron

DIMENSIONS

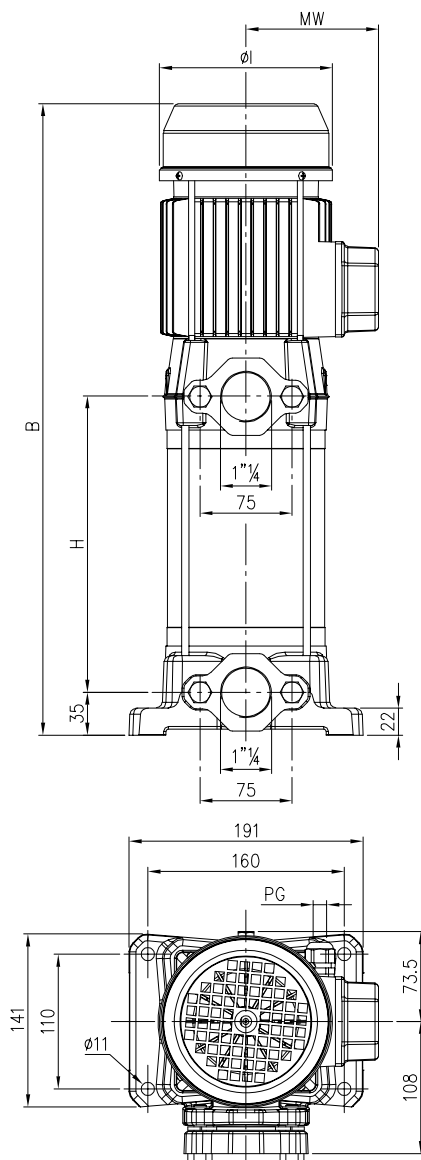


[1]= Three phase only
[2]= Single phase only
* Models with IE3 motor only

DIMENSIONS TABLE

Model		Motor Mec	Dimensions [mm]				Dimensions [mm]				PG		Weight [kg]		
Single phase 230V	Three phase 230/400V		[2]	B [1]	*	H	ØI	MW [2]	[1]	M *	[2]	[1]	[2]	[1]	*
CVM AM/4	CVM A/4	63	336	336	-	112	124	101	91.5	-	11	11	11.0	11.0	-
CVM AM/6	CVM A/6	63	362	362	-	138	124	101	91.5	-	11	11	11.7	11.6	-
CVM AM/8	CVM A/8	63	388	388	-	164	124	101	91.5	-	11	11	12.7	12.6	-
CVM AM/10	CVM A/10	71	452	452	452	190	141	110.5	101	M16x1.5	11	11	16.5	16.6	16.6
CVM AM/12	CVM A/12	71	478	490	490	216	141	110.5	101	M16x1.5	11	11	17.5	18.4	18.4
CVM AM/15	CVM A/15	71	516	516	516	242	141	110.5	101	M16x1.5	11	11	18.5	18.6	18.6
CVM AM/18	CVM A/18	80	565	565	565	268	159	136	120.5	M20x1.5	13.5	11	21.2	21.8	22.7
CVM BM/10	CVM B/10	71	400	400	400	138	141	110.5	101	M16x1.5	11	11	15.9	15.9	15.9
CVM BM/12	CVM B/12	71	426	438	438	164	141	110.5	101	M16x1.5	11	11	16.8	17.5	17.5
CVM BM/15	CVM B/15	71	464	464	464	190	141	110.5	101	M16x1.5	11	11	18.0	17.9	17.9
CVM BM/20	CVM B/20	80	513	526	526	216	159	134.5	120.5	M20x1.5	13.5	11	21.3	22.8	23.7
CVM BM/23	CVM B/23	80	552	552	552	242	159	134.5	120.5	M20x1.5	13.5	11	22.6	23.4	24.3
-	CVM B/25	80	-	578	578	268	159	-	120.5	M20x1.5	-	11	-	23.7	24.6

VERTICAL MULTISTAGE CENTRIFUGAL ELECTRIC PUMPS in cast iron

SECTIONAL VIEW

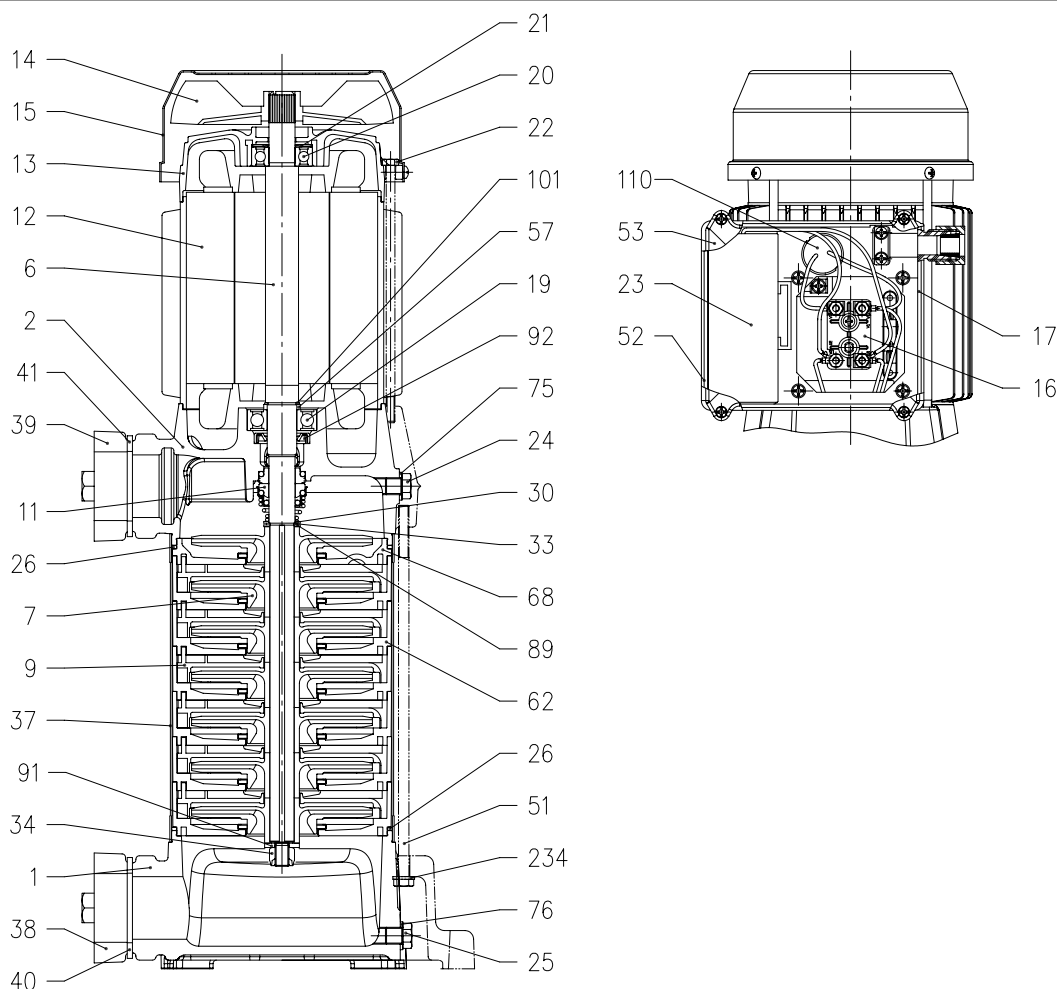


MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material
1	Pump body	Cast iron EN-GJL-200-EN 1561	33	Seeger ring	EN 1.4021 (AISI 420) (Dim. 12)
2	Pump body support	Cast iron EN-GJL-200-EN 1561	34	Impeller nut	EN 1.4301 (AISI 304) (Dim. 14)
6	Shaft	EN 1.4005 (AISI 416)	37	Casing	EN 1.4301 (AISI 304)
7	Impeller	PPE+PS reinforced with fibreglass	38	Counter-flange	Cast iron EN-GJL-200-EN 1561
9	Diffuser	PPE+PS reinforced with fibreglass	39	Counter-flange	Cast iron EN-GJL-200-EN 1561
11	Mechanical seal	Ceramic/Carbon/NBR	40	Counter-flange gasket	NBR
12	Motor case	-	41	Counter-flange gasket	NBR
13	Motor cover	Aluminium	51	Pump tie-rod	Galvanised Fe P04
14	Fan	PA	52	Capacitor-holder box [2]	ABS
15	Fan cover	Galvanised Fe P04	53	Capacitor-holder box cover [2]	ABS
16	Terminal Box	-	57	Spacer [3]	Steel C40
17	Terminal Box cover [1]	Aluminium	62	Stage box	PPE+PS reinforced with fibreglass/PTFE
19	Bearing (pump side)	-	68	Stage	PPE+PS reinforced with fibreglass/PTFE
20	Bearing (motor side)	-	75	Washer	Aluminium
21	Adjustment ring	Steel C70	76	Washer	Aluminium
22	Motor tie-rod	Galvanised Fe 42	89	Washer	EN 1.4301 (AISI 304)
23	Capacitor [2]	-	91	Washer	EN 1.4301 (AISI 304)
24	Filler cap	OT 58 UNI 5705	92	Sealing ring	NBR
25	Drain plug	OT 58 UNI 5705	101	Seeger ring [3]	EN 1.4301 (AISI 304)
26	O-Ring	NBR	110	Motor protector [4]	-
30	Washer	EN 1.4301 (AISI 304)	234	Washer	Galvanised steel


VERTICAL MULTISTAGE CENTRIFUGAL ELECTRIC PUMPS

in cast iron

MECHANICAL SEAL for CVM up to 0.6 kW

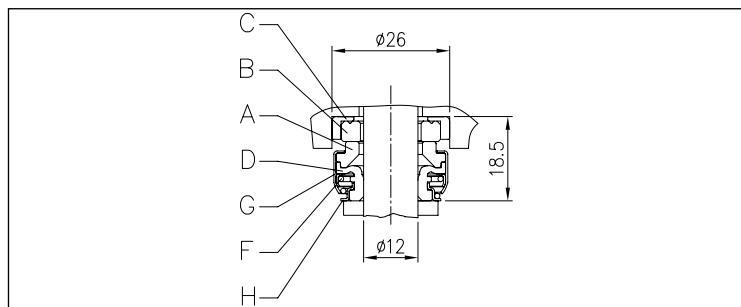

MECHANICAL SEAL for CVM from 0.75 kW and over

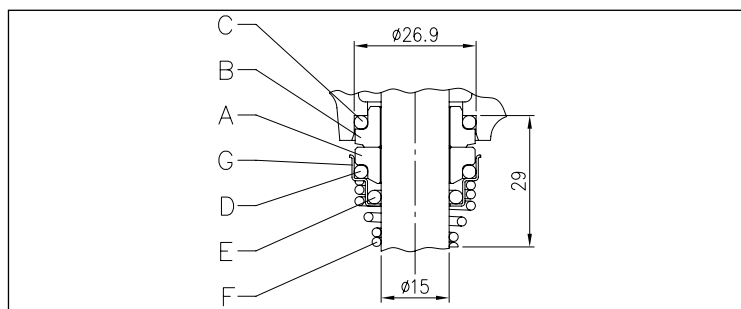

MATERIALS TABLE

Ref.	Name	Material
A	Rotating part	Carbon
B	Fixed part	Ceramic
C	Gasket	NBR
D	Diaphragm	NBR
F	Spring	AISI 304
G	Structure/frame	AISI 304
H	Retainer ring	AISI 304

MATERIALS TABLE

Ref.	Name	Material
A	Rotating part	Ceramic
B	Fixed part	Carbon
C	O-Ring	NBR
D	O-Ring	NBR
E	O-Ring	NBR
F	Spring	AISI 316
G	Structure/frame	AISI 304

ELECTRIC DATA TABLE

Model	Single phase 230V	Three phase 230/400V	P ₂		Efficiency		Capacitor		Efficiency (%)			P ₁		Absorbed Current [A]		
			[HP]	[kW]	Single phase	Three phase	Single phase μF	V _i	Three phase			Single phase [kW]	Three phase [kW]	Single phase 230V	Three phase 230V	400V
									50%	75%	100%					
CVM AM/4		CVM A/4	0.4	0.3	-	-	10	450	-	-	-	0.54	0.49	2.6	1.9	1.1
CVM AM/6		CVM A/6	0.6	0.44	-	-	12.5	450	-	-	-	0.69	0.69	3.2	2.3	1.3
CVM AM/8		CVM A/8	0.8	0.6	-	-	14	450	-	-	-	0.89	0.83	4.0	2.8	1.6
CVM AM/10		CVM A/10	1	0.75	-	IE2	20	450	77.2	80.9	81.3	1.27	0.92	6.0	2.9	1.7
-			1	0.75	-	IE3	-	-	80.9	82.3	82.1	-	0.91	-	3.0	1.7
CVM AM/12		CVM A/12	1.2	0.9	-	IE2	31.5	450	79.0	81.7	81.6	1.45	1.35	6.5	4.3	2.5
-			1.2	0.9	-	IE3	-	-	81.7	83.1	82.4	-	1.34	-	4.3	2.5
CVM AM/15		CVM A/15	1.5	1.1	-	IE2	31.5	450	79.0	81.7	81.6	1.60	1.35	7.2	4.3	2.5
-			1.5	1.1	-	IE3	-	-	81.7	83.1	82.4	-	1.34	-	4.3	2.5
CVM AM/18		CVM A/18	1.8	1.3	-	IE2	35	450	79.7	82.5	83.0	1.76	1.80	7.8	5.6	3.2
-			1.8	1.3	-	IE3	-	-	83.0	85.8	85.6	-	1.77	-	5.8	3.3
CVM BM/10		CVM B/10	1	0.75	-	IE2	20	450	77.2	80.9	81.3	1.14	0.92	5.6	2.9	1.7
-			1	0.75	-	IE3	-	-	80.9	82.3	82.1	-	0.91	-	3.0	1.7
CVM BM/12		CVM B/12	1.2	0.9	-	IE2	31.5	450	79.0	81.7	81.6	1.38	1.35	6.2	4.3	2.5
-			1.2	0.9	-	IE3	-	-	81.7	83.1	82.4	-	1.34	-	4.3	2.5
CVM BM/15		CVM B/15	1.5	1.1	-	IE2	31.5	450	79.0	81.7	81.6	1.63	1.35	7.4	4.3	2.5
-			1.5	1.1	-	IE3	-	-	81.7	83.1	82.4	-	1.34	-	4.3	2.5
CVM BM/20		CVM B/20	2	1.5	-	IE2	40	450	78.6	83.0	84.2	1.91	1.78	8.3	6.3	3.7
-			2	1.5	-	IE3	-	-	82.7	86.1	87.0	-	1.72	-	6.6	3.8
CVM BM/23		CVM B/23	2.3	1.7	-	IE2	40	450	80.3	83.4	83.8	2.14	2.09	9.6	6.9	4.0
-			2.3	1.7	-	IE3	-	-	84.2	86.8	86.9	-	2.01	-	7.1	4.1
-		CVM B/25	2.5	1.85	-	IE2	-	-	83.0	84.4	83.8	-	2.63	-	8.1	4.7
-			2.5	1.85	-	IE3	-	-	86.2	87.0	86.0	-	2.55	-	8.2	4.7



CVM

VERTICAL MULTISTAGE CENTRIFUGAL ELECTRIC PUMPS

in cast iron

NOISE DATA TABLE

Single phase 230V	Model Three phase 230/400V	P ₂		L _{pa} - dB(A)*
		[HP]	[kW]	
CVM AM/4	CVM A/4	0.4	0.3	53
CVM AM/6	CVM A/6	0.6	0.44	
CVM AM/8	CVM A/8	0.8	0.6	
CVM AM/10	CVM A/10	1	0.75	62
CVM AM/12	CVM A/12	1.2	0.9	
CVM AM/15	CVM A/15	1.5	1.1	
CVM AM/18	CVM A/18	1.8	1.3	67
CVM BM/10	CVM B/10	1	0.75	62
CVM BM/12	CVM B/12	1.2	0.9	
CVM BM/15	CVM B/15	1.5	1.1	
CVM BM/20	CVM B/20	2	1.5	67
CVM BM/23	CVM B/23	2.3	1.7	
-	CVM B/25	2.5	1.85	

* Average noise level measured at 1 m from the motor pump.
Tolerance ± 2.5 dB.